FoldTite Systems
www.FoldTite.com

NOT TO SCALE

George Klopfer
3973 Skyway Drive
Wing Sourth Lot 16
Naples, FL 34112

Check Actual System for Panel and Girt Quantity
Print Shows - 8 Panel 4 Girts including Top Rail
Rail plus bottom rail.

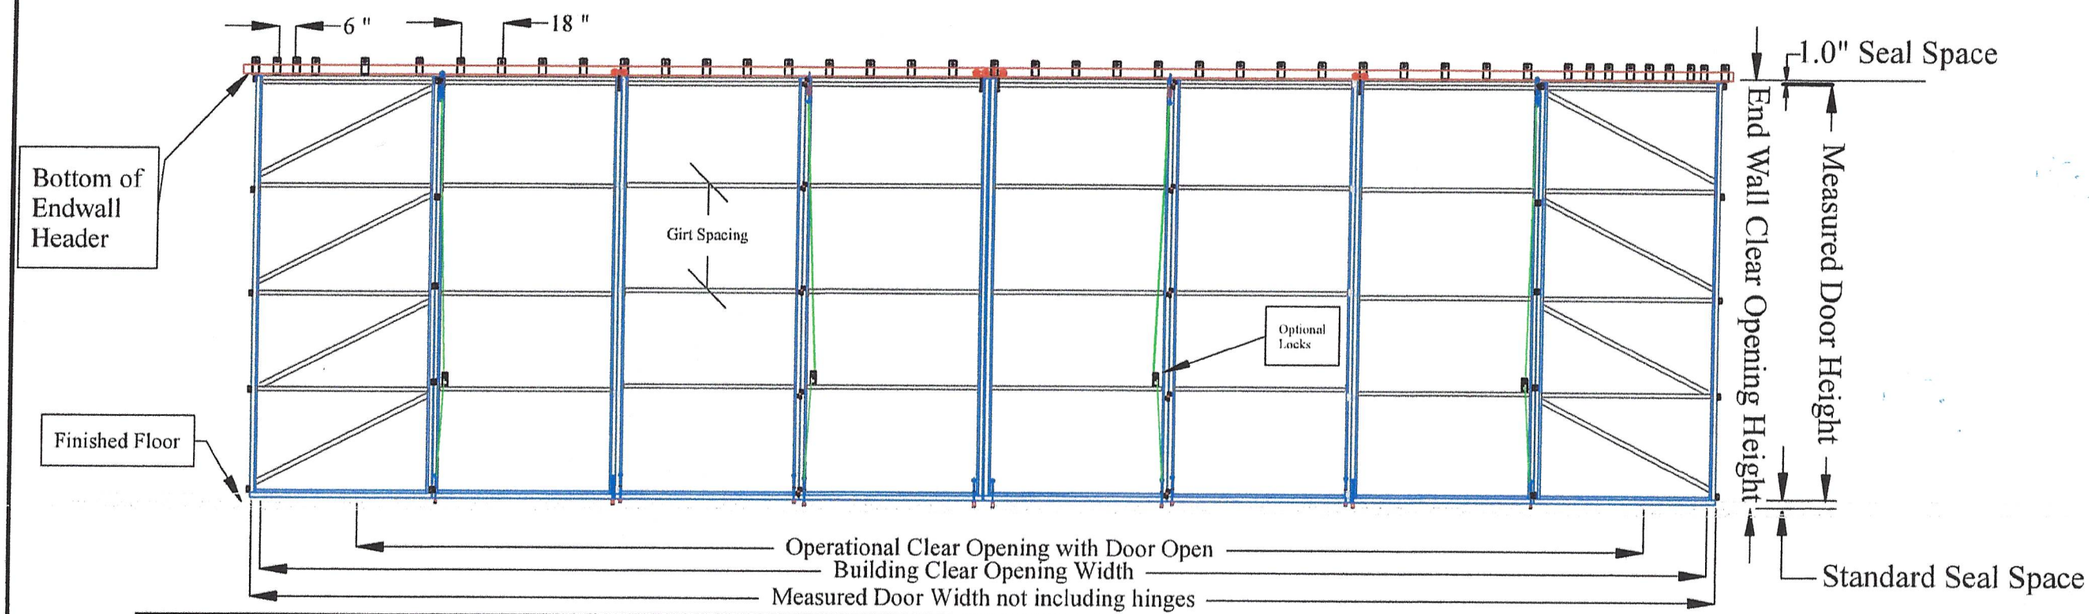

Feet	Inches	Specifications for Print Dimensions		
43	2	Building Framed Opening Width	Door Series	CSA-5.0 Plus
12	0	Framed Opening Height	Total Panels	8
5	3.95	Outboard Hinged Panel	Panel Qty	2
5	4.45	Standard Sliding Panel Width	Panel Qty	4
5	8.449	Center Panels	Panel Qty	2
3	5.72	Fold Tite Stack Dimension		
43	7.09	Measured Door Width with 2.75" Lap and 1/2" between center panels		
44	0.89	Overall Width required for door operation		
40	7.17	Operational Clear Opening with Door Open (overall width minus stack)		
	1.5	Seal Space Under Door		
	6	Space required for Door Installation on Front face of Header		
11	9.51	Measured Door Height		
11	7.5	Sheeting Height (For Covering Supplied By Others) Confirm at Site		
11	7.5	Actual Length of Vertical as shipped		
2	8.69	Horizontal Girt Spacing between girts	Girt Qty	4

Rollers for recessed guide supplied, channel in concrete required

This item has been electronically signed and sealed by William F. Stuhrke on the Date/Time stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ENGINEERING
William F. Stuhrke, PhD, P.E.
State of Florida PE # 22150
12215 Rebeccas Run Dr.
Winter Garden, FL 34787
(407) 920-3119

William F. Stuhrke, PhD, P.E.
Aug 26 2018 12:32 PM
DocuSign

Fold Tite Sys,Inc.	Fold-Tite Stacker System
Actual System 8 Panel 4 Girt Plus Bottom Rail	8/3/2018
Door System CSA-5.0 Plus	KLO_FT4312Q T080318